


## 308nm Filters for Imaging of O-H Emission

- CWL 308nm  $\pm$  2.5nm
- Greater than 40% transmission including blocking filters
- 20nm  $\pm$  2nm FWHM for imaging applications with higher NA lenses.
- Greater than OD 4 blocking.
- Diameter 50mm
- Mounted on 52mm lens thread.
- Hard coated, non-hydroscopic
- Each supplied with measured spectral data and certificate of conformity.

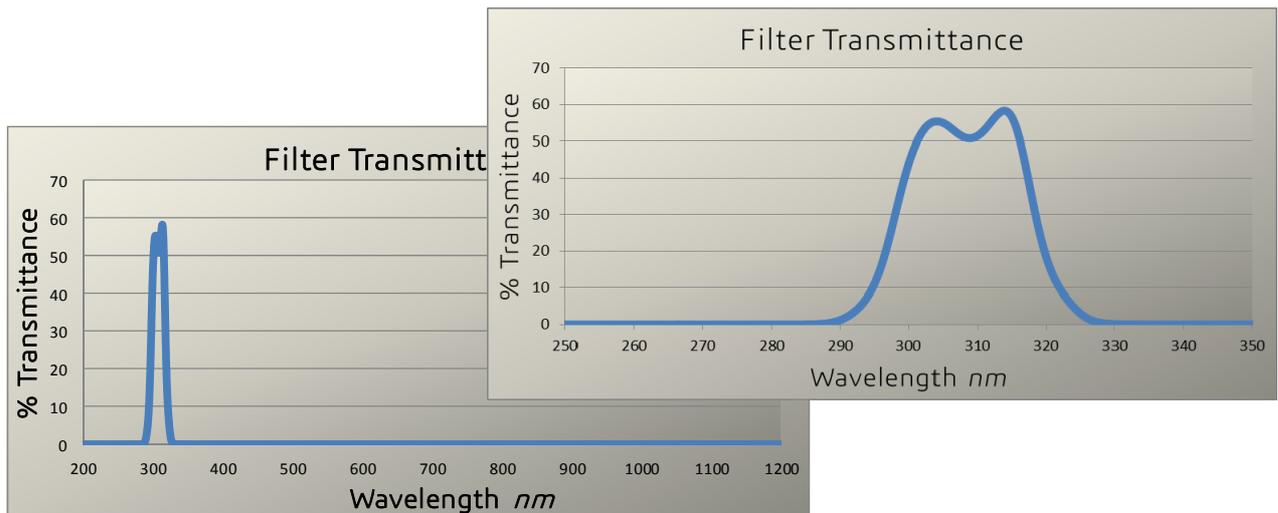

CWL 308nm  $\pm$  2.5nm, FWHM 20nm  $\pm$  2nm, Peak Transmission 40% min., Blocking UV to 1200nm OD > 4

Invisible Vision Ltd. reserves the right to modify specifications without notice.  
The Invisible logo is a registered trademark of Invisible Vision Ltd.

© Invisible Vision Ltd. 2015. All rights reserved.